MP2-10MTS
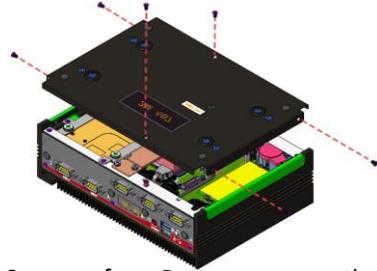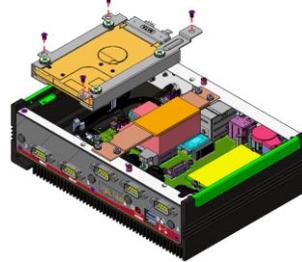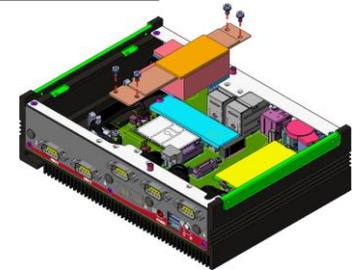
Open Bottom Cover

1. Loosen 6 screws from Bottom cover as the dash line locations.

Release HDD Tray

2. Loosen 4 screws of HDD tray as arrow direction & pull out HDD tray.
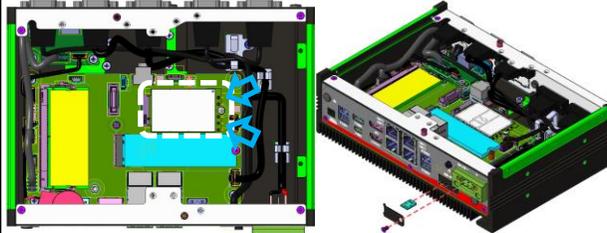
Release M.2 Heatsink

3. Loosen 4 screws of M.2 heatsink as the dash line locations & pull out heatsink.
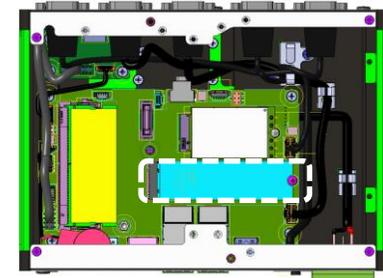
DRAM Maintenance

4. Install DIMM to MB on dash line area , **no need to disassemble HDD tray and M.2 heatsink**.

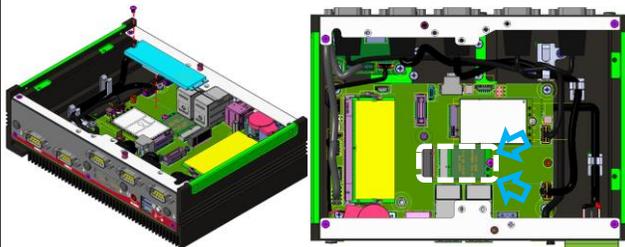## M.2 B-Key 4G/5G Card Installation

5. Install 4G/5G card on M.2 slot & plug in antenna IPEX header on 4G/5G card as arrow locations, then install the SIM card from rear IO.

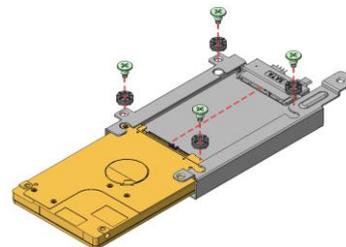## M.2 M-Key SSD Installation

6. Install M.2 SSD on M.2 slot on dash line area.
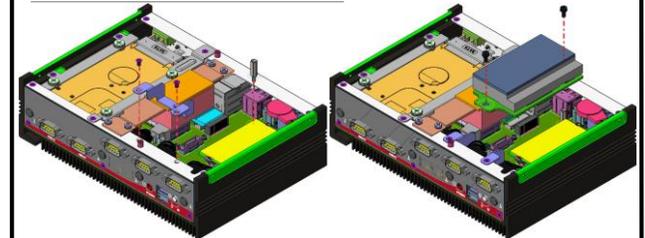
M.2 E-Key Wi-Fi Card Installation

7. Disassemble M.2 SSD, install Wi-Fi card on M.2 slot & plug in antenna IPEX header on Wi-Fi card as arrow locations, then assemble the M.2 SSD back.

HDD Installation on Tray

8. Install HDD into HDD tray, pick up HDD screw kit from accessory and fixed as dash line locations.

POE Module Installation

9. Install POE bracket to chassis, hex stud on MB and fixed as dash line locations then install POE module on MB and fixed as dash line locations.